



**i** COUNT

# SISTEMAS DE GESTIÓN DE ESPACIOS

## SPACE MANAGEMENT SYSTEMS

### Wireless signal repeater

For "indoor" parking guidance systems in:

- Shopping centres/ retails
- Public car park
- Airport
- Hotels

WE MAKE  
SENSE


ENKOA



## Characteristics

DESCRIPTION	Wireless signal repeater for the wireless display
REFERENCE	REZxIGS
POWER	Universal 85-264VAC (47-440Hz)
MAX. CONSUMPTION	50 mA(max), 20mA (avg)
COMMUNICATIONS	2,4 GHz , IEEE 802.15.4 wireless.
COVERAGE	External antenna with max. 80m coverage outdoors without obstacles.
INTERFACE	Red led diode for indications
OPERATIVE	Inner button for synchronizing it with the display
DIMENSIONS	Housing 89x89x54 mm/ electronics 77x75mm
HOUSING	Schneider ABS box IP66/IK07

## Dimensions

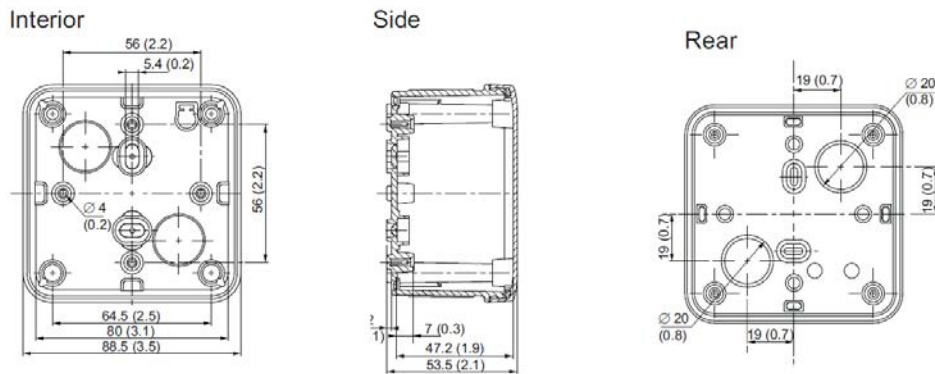

## Benefits

**EASY TO SYNCHRONIZE** : Inner button for synchronizing it with the display

**HIGH DISTANCE COVERAGE**: up to 80 m outdoors without obstacles.